



Description		Size mm
Shaft		
D	Shaft Diameter	
	Shaft Sleeve Present (Yes/No)	
D1	Sleeve O.D.	
L4	Length Past Seal Chamber	
Seal Chamber		
D4	Seal Chamber Bore	
L1	Seal Chamber Depth	
D2	Throat Bore ID	
Gasket		
D5	Gasket I.D.	
D6	Gasket O.D.	
Bolts		
D3	Bolt Size	
	Number of Bolts	
	Bolts PCD	
L3	Bolt Length Past Gasket	
A1	DEG to First Stud (eg. 45°)	
A2	Bearing Bracket Bolt Angle	
Nearest Obstruction		
D8	Nearest Obstruction on the O.D.	
L6	Nearest Obstruction on Axial	
Spigot If Applicable		
D5	Spigot I.D.	
L5	Spigot Depth	
Bearing Bracket		
D7	Bearing Bracket ID	
D9	Seal Chamber Flush Port Dia.	
D10	Bearing Bracket Bolt Size	
L7	Dist to Bracket from Seal Chamber	
L8	Length of Bracket Window	
L2	Dist to Chamber Flush Port	

Current Seal	
Manufacturer	
Code	
Single / Double	
Internally / externally mounted	
Face Material	
Inboard Stationary	
Inboard Rotary	
Outboard Stationary (if double seal)	
Outboard Rotary (If double seal)	
Elastomer	
Material	
Type (eg. o ring / wedge etc.)	
Application	
Product Media	
SG of Slurry and Volumetric Weight	
Pressure	
Temperature	
Shaft Speed	
Current Piping Arrangement	
Piping Fitting Size (eg. 1/4")	
Quench / Drain required (Y/N)	
Flush required (Y/N)	
Equipment	
Type (eg. pump / mixer etc.)	
Manufacturer	
Code	
Material of Wetted Parts	

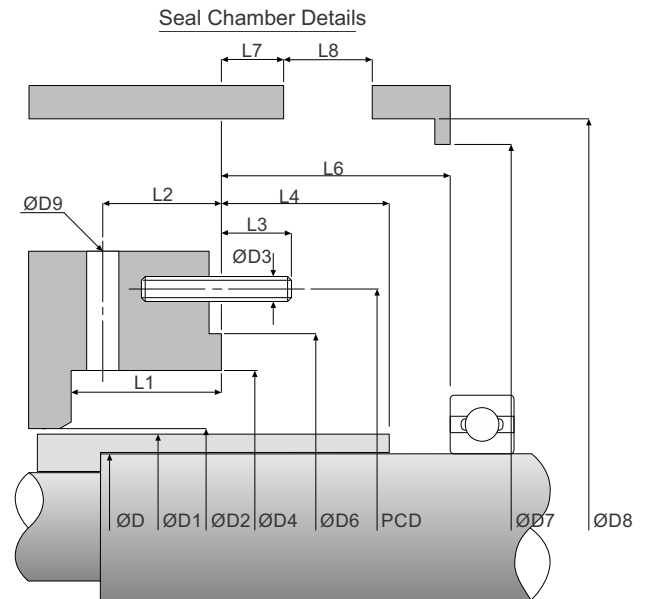

Spigot Details If Applicable



Face View

